




Advance Features Include:

- ✓ Large Platform Size: 16.5" X 20.5" (420 mm X 520 mm)
- ✓ High Capacities: 120 lb or 300 lb (60 kg or 120 kg)
- ✓ Tilt & Swivel display head
- ✓ High Resolution: 1/6000 NTEP Approved class III
- ✓ Large LCD displays with 6 digit pricing and weight.
- ✓ Universal AC Adapter included
- ✓ 12 Direct PLU keys programmable with tare and unit price!
- ✓ Built-In rechargeable battery: Over 100 hours of continuous use!
- ✓ Percentage Tare feature



BK-Series Feature Guide

- | | |
|---|--|
| <ul style="list-style-type: none">❑ 1/6000 Resolution, Legal for Trade, NTEP CC # 06-083❑ Large Stainless Steel Removable Platter❑ Ultra Quick-Response Weight display❑ Heavy Duty design, IP-65 Rating❑ Tough high quality UV-sealed keypad❑ Large size heavy-duty cast aluminum platform | <ul style="list-style-type: none">❑ Capacities: 120 x 0.02 lb or 300 x 0.05 lb❑ Tilt and Swivel Display Indicator head❑ User-friendly PLU programming❑ Quick operation keypad for high throughput❑ Function keys: 12 PLUs, Save, Tare, and Zero❑ Internal power supply & standard AC Power Cord |
|---|--|

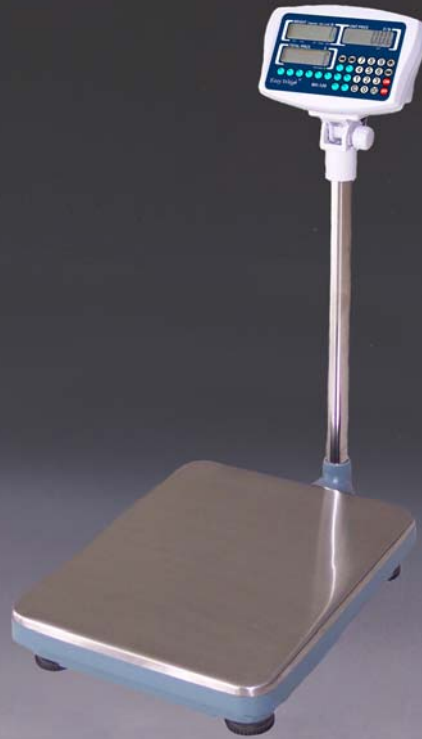

Technical Specifications

Models:	BK-120	BK-300	BK-600
Capacity and Graduation:	120 x 0.02 lb	300 x 0.1 lb	600 x 0.2 lb
Maximum Tare:	120 lb	300 lb	600 lb
NTEP Certificate Number:	Approved 1/6000 resolution, Legal for Trade, CC # 06-083		
A/D Conversion Rate:	50 Updates / second		
Direct PLU Keys:	12 Direct PLU keys which can be programmed with Tares and Unit Prices		
Liquid Crystal Displays (LCD):	Weight: 6 Digits,	999.999 max	
	Unit Price: 6 Digits,	9999.99 max	
	Total Price: 6 Digits,	9999.99 max	
Platter Size:	Width: 420 mm / 16.5"		
	Length: 520 mm / 20.5"		
Accreditation:	NTEP Class III, OIML, CE, ISO 9002, UL [®]		
Product Dimensions:	Width: 420 mm / 16.5"		
	Length: 520 mm / 20.5"		
	Height: 940 mm / 37.0"		
AC Specifications:	Internal Power Supply, (AC Cord)	External Adapter	
	120 Volts AC @ 60 Hz, AC Power Cord	120 Volts AC @ 60 Hz to 9VDC @ 800 mA	
Battery Specifications:	100 hrs with Backlight Off or 48 hrs with Backlight On (Continuous use.)		
Power Consumption & Fuse Rating:	Approximately 10 Watts / Fuse: 250 Volts, 1.5 Amp, 20 mm		

Options

<input type="checkbox"/> Foreign Power Cords & AC Adapters Available	<input type="checkbox"/> Laundry Basket
<input type="checkbox"/> Cigarette Lighter Car Adapter, (For External Adapter models ONLY)	<input type="checkbox"/> Wet-Proof Protective Overlay

ATRON
SYSTEMS INC.
West Caldwell, NJ 07006
www.atronsystems.com

Easy Weigh[™]

Distributed by:

*NOTE: Specifications are subject to change without notice.