




#### Advance Features Include:

- ✓ Large Platform Size: 16.5" X 20.5" (420 mm X 520 mm)
- ✓ High Capacities: 120 lb, 300 lb. or 600 lb (60 kg, 120 kg, or 300 kg)
- ✓ High Resolution: 1/6000 NTEP Approved class III
- ✓ Large LCD display with 6 digit weighing.
- ✓ Standard AC Cord; no clumsy adapter!
- ✓ 7 Units: Pounds, oz, kg, grams, Pieces, Percent, & Pound/Ounces!
- ✓ Built-In rechargeable battery: Over 100 hours of continuous use!
- ✓ Comparator feature for Hi-Lo Check Weighing
- ✓ Customizable Hold feature for high-motion weighing
- ✓ Models with RS-232 Port for ECR, PC, or Printer interface



#### BX-Series Feature Guide

- |  |  |
|--|--|
| <ul style="list-style-type: none"><li>❑ 1/6000 Resolution, Legal for Trade, CC # 06-035</li><li>❑ Large Stainless Steel Removable Platter</li><li>❑ Ultra Quick-Response Weight display</li><li>❑ Heavy Duty design, IP-65 Rating</li><li>❑ Tough high quality UV-sealed keypad</li><li>❑ Large size heavy-duty cast aluminum platform</li></ul> | <ul style="list-style-type: none"><li>❑ Capacities: 120 lb, 300 lb, or 600 lb</li><li>❑ Tilt and Swivel Display Indicator head</li><li>❑ User-friendly intuitive programming</li><li>❑ Quick operation keypad for high throughput</li><li>❑ Function keys: G/N/T, Unit, Mode, Tare, &amp; Zero</li><li>❑ Internal power supply with long AC power cord</li></ul> |
|--|--|

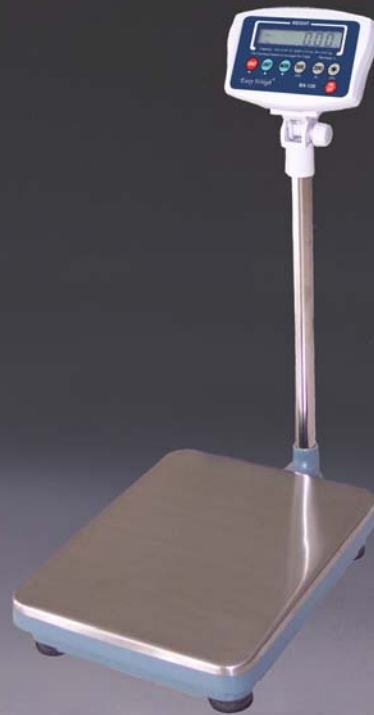

**Technical Specifications**

Models:	BX-120+	BX-150	BX-300	BX-300+	BX-600	BX-600+
Capacities and Graduations:	120 x 0.02 lb	150 x 0.05 lb	300 x 0.1 lb	300 x 0.05 lb	600 x 0.2 lb	600 x 0.1 lb
	2000 x 0.5 oz	2000 x 1 oz	4800 x 2 oz	4800 x 1 oz	9600 x 5 oz	9600 x 2 oz
	60 x 0.01 kg	60 x 0.02 kg	150 x 0.05 kg	120 x 0.02 kg	300 x 0.1 kg	300 x 0.05 kg
Maximum Tare:	Can tare up to Maximum Capacity					
NTEP Certificate Number:	Approved 1/6000 and 1/3000 resolution, Legal for Trade, CC #06-035					
A/D Conversion Rate:	50 Updates / second					
Connectivity:	Models available with RS-232 Port for connection to ECR, PC, or serial Printer					
Liquid Crystal Displays (LCD):	Weight: 6 Digits, 999.999 max					
Platter Size:	Width: 420 mm / 16.5"					
	Length: 520 mm / 20.5"					
Accreditation:	NTEP Class III, OIML, CE, ISO 9002, UL <sup>®</sup>					
Product Dimensions:	Width: 420 mm / 16.5"					
	Length: 520 mm / 20.5"					
	Height: 940 mm / 37.0"					
AC Specifications:	Internal Power Supply, (AC Cord)			External Adapter		
	120 Volts AC @ 60 Hz, AC Power Cord			120 Volts AC @ 60 Hz to 9VDC @ 800 mA		
Battery Specifications:	100 hrs with Backlight Off or 48 hrs with Backlight On (Continuous use.)					
Power Consumption & Fuse Rating:	Approximately 10 Watts / Fuse: 250 Volts, 1.5 Amp, 20 mm					

**Options**

<input type="checkbox"/> Foreign Power Cords & AC Adapters Available	<input type="checkbox"/> Laundry Basket
<input type="checkbox"/> Cigarette Lighter Car Adapter, (For External Adapter models ONLY)	<input type="checkbox"/> Wet-Proof Protective Overlay